


**Model 906**

## Modification notes

8.1.16	For vehicle wiring harness with 4 connectors, replace 6-pin connector housing.	Operation step 1	
--------	--	------------------	--

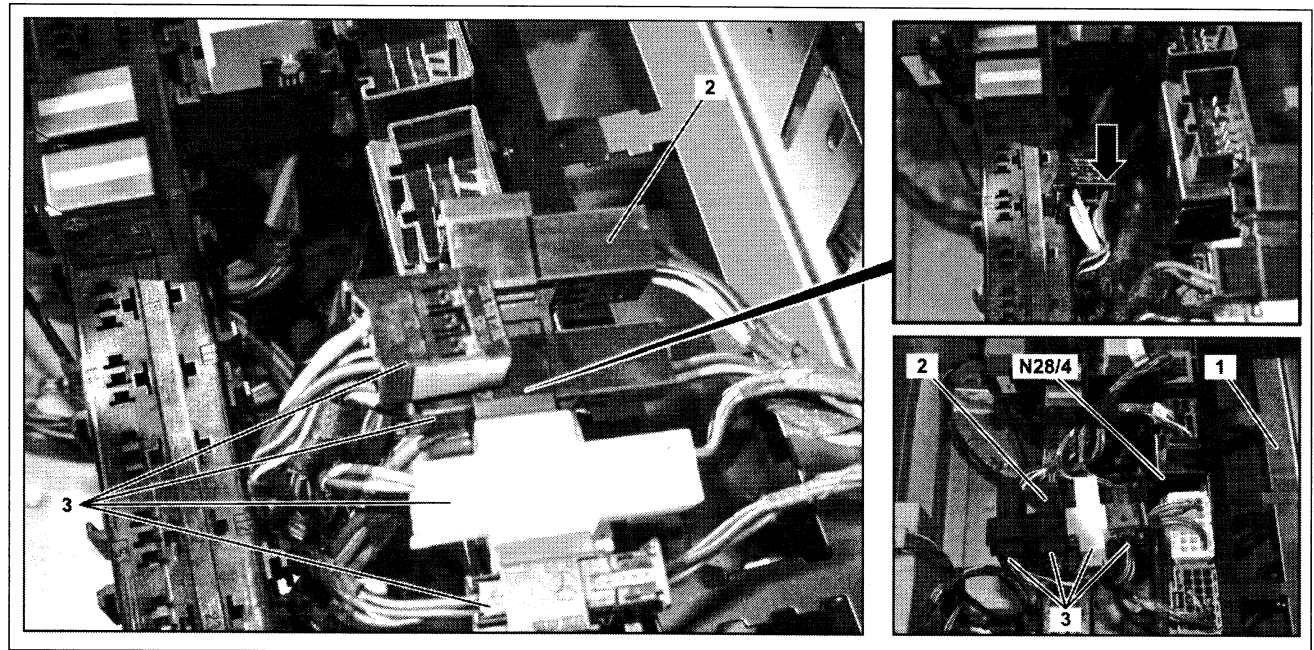

D31.19-1207-09

- 1 Replace 6-pin plug of vehicle wiring harness (3) with 6-pin plug from installation kit.

For vehicle wiring harness (3) with four connectors.

**i** Copy contact cavity assignment 1 to 1.

- 2 Connect adapter wiring harness (2) to vehicle wiring harness (3).

For vehicle wiring harness (3) with four connectors.

- 3 Connect electrical connections of adapter wiring harness (2) or vehicle wiring harness to trailer recognition control unit TM906 (N28/4).

- 4 Fasten trailer recognition control unit TM906 (N28/4) to bracket (1) in seat base.

**i** **Installation:** Screw or clip in depending on the bracket variant.