

Passenger's side door



Begin prying here to create a gap

This will allow you to use something to release the (4) tabs below

Handle without cover




(4) tabs on the outer part help hold the handle together

Door handle pieces



(3) tabs on the inside part of the handle. I think they also aid in holding the handle together


Detail of clips

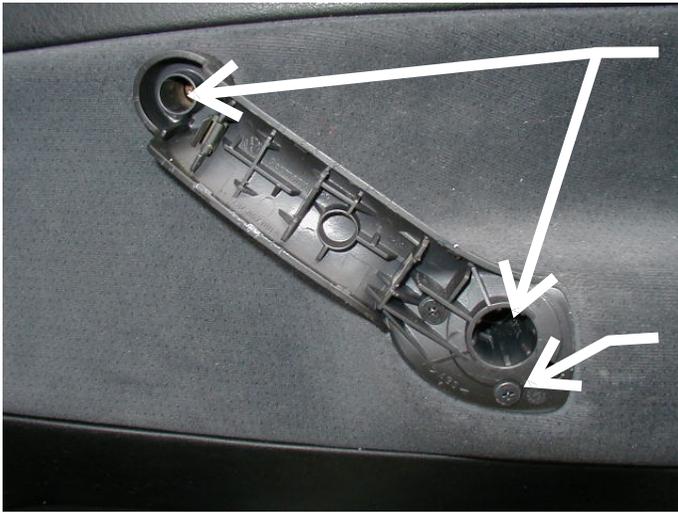

Handle without cover

There are (2) brass screws That hold the handle to the door

There are (4) additional black sheet metal screws that help hold the handle to the door trim panel

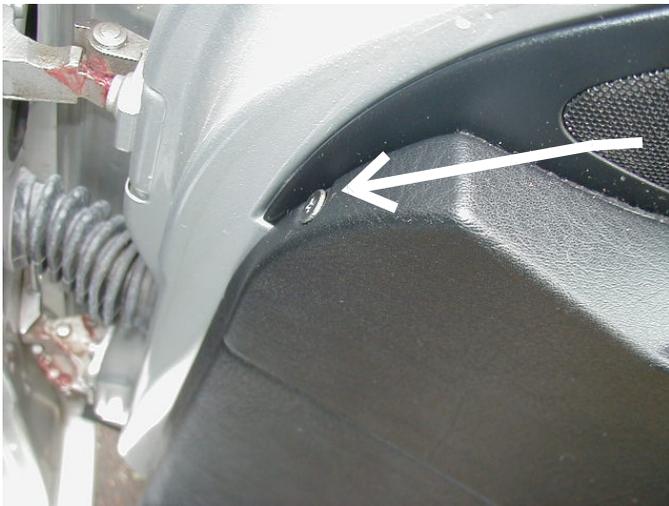


Next, remove this screw at the FRONT part of the door

Next, remove this (3) screws at the bottom part of the door



Start at the bottom using a stiff putty knife. Locate each clip and pry slowly until it releases

Apply additional but *gentle* pressure by pulling on the door trim panel

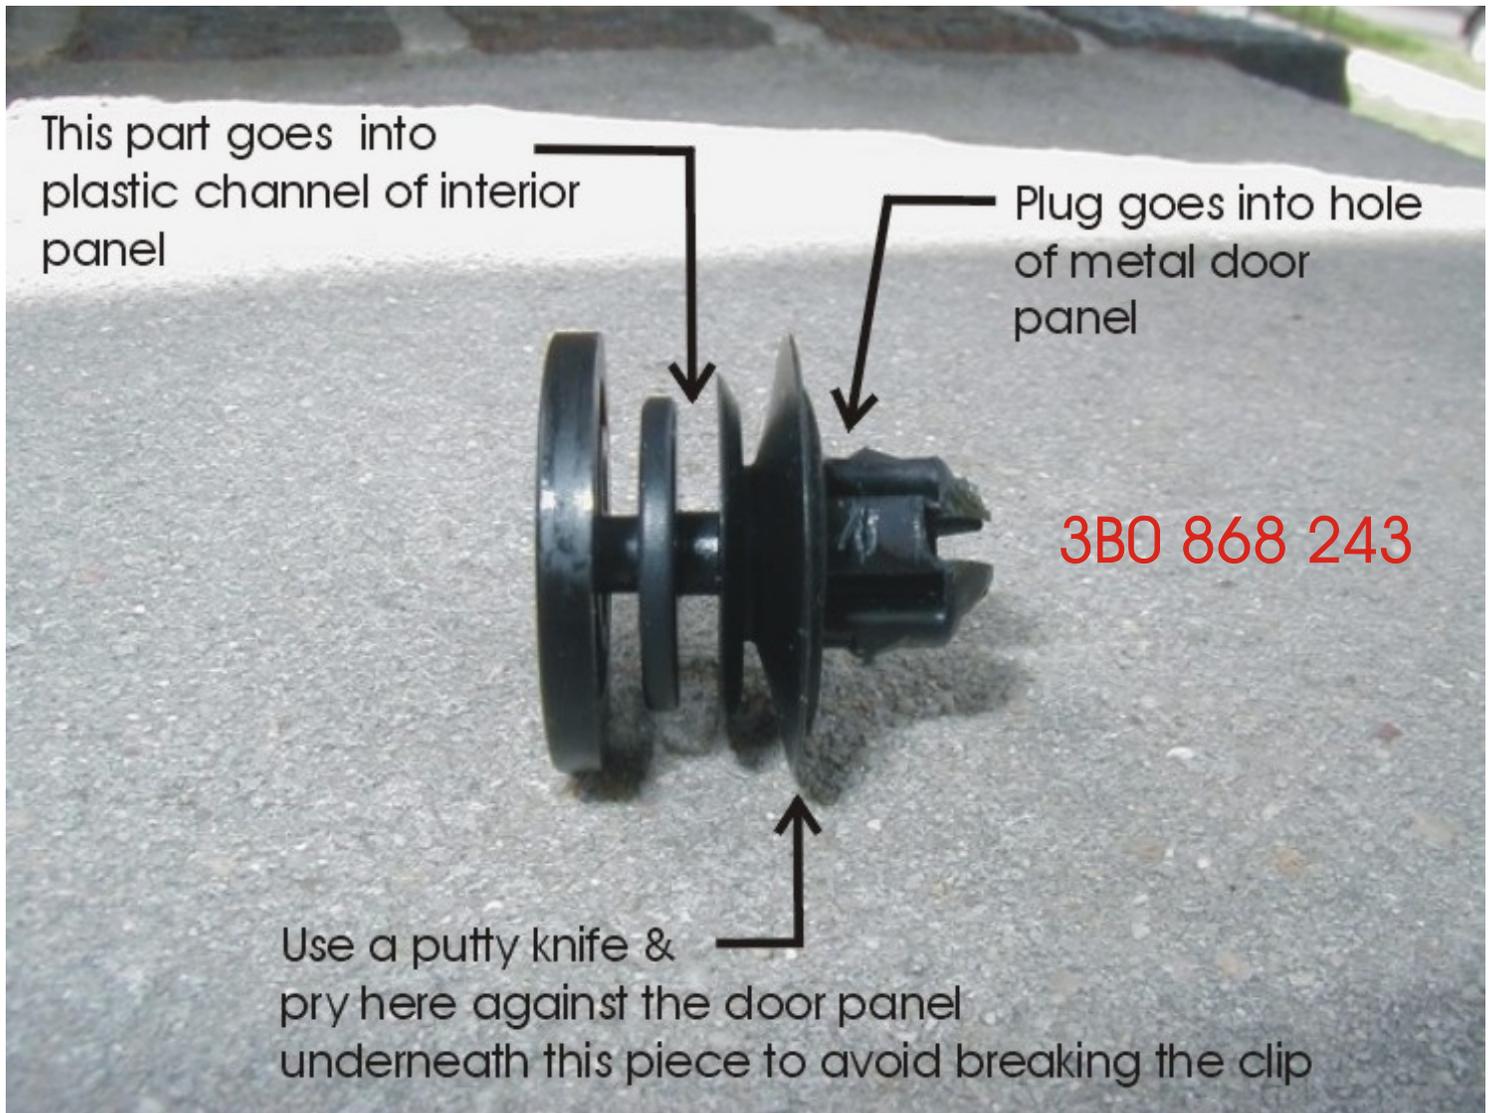

I recommend getting several extra clips when taking any door apart. They may break and are inexpensive to replace

Driver's side door



Pry handle from underneath



Separate the inside piece



Using a putty knife, push tab forward



Pry up. You can use another knife underneath the handle part to assist in removing



Pry up and remove from back to front



Remove (3)
screws on the
bottom of panel